

HIGH PRESSURE GREASE SWIVELS HFC HFC-R HFC-S

esp Rotula para engrase fr Raccords pivotants de Drezeled Flerakset for smorepistoler

Product Brief

Installed between the delivery hose & grease control valve, swivels permit easy handling of control valves and prevent damage to hose caused by twisting

Swivels have a heavy duty steel construction with ball bearings for smooth operation and free unrestricted movement

The swiveling joints are hardened for durability & wear resistance

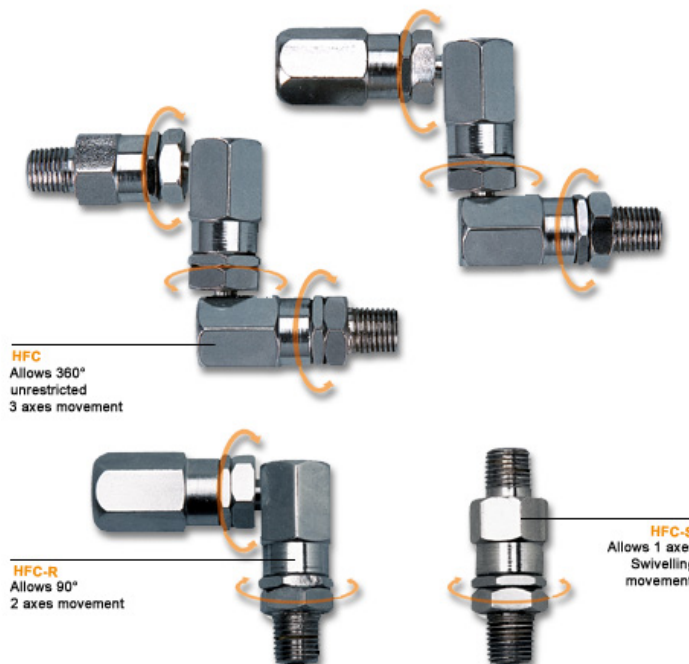
Available in three forms: Straight, 90° & Z-360°, in varying thread specifications. Other thread sizes can be made on request



Max. Working
Pressure:
6,000 PSI
413 BAR

! WARNING

This product contains, chemicals, including lead, know to the state of California to cause cancer, birth defects or other reproductive harm.
Wash Hands After Handling.


Ordering Information

Cat. Nr.	Ordering Nr.	Thread Specifications	
Straight Swivels			
HFC/S/1-4F/1-4M/B	43800	1/4" BSPT (F)	1/4" BSPT (M)
HFC/S/1-4F/1-8M/B	43801	1/4" BSPT (F)	1/8" BSPT (M)
HFC/S/1-8M/1-8M/N	43802	1/8" NPTF (M)	1/8" NPTF (M)
HFC/S/1-8F/1-8M/N	43803	1/8" NPTF (F)	1/8" NPTF (M)
HFC/S/1-4M/1-2-27M/N	43804	1/4" NPTF (M)	1/2" -27 NS (M)
90° Swivels			
HFC/R/1-4F/1-4M/B	43810	1/4" BSPT (F)	1/4" BSPT (M)
HFC/R/1-4F/1-8M/B	43811	1/4" BSPT (F)	1/8" BSPT (M)
HFC/R/1-8M/1-8M/N	43812	1/8" NPTF (M)	1/8 NPTF (M)
HFC/R/1-8F/1-8M/N	43813	1/8" NPTF (F)	1/8" NPTF (M)
HFC/R/1-4M/1-2-27M/N	43814	1/4" NPTF (M)	1/2" -27 NS (M)
Z - 360° Swivels			
HFC/1-4M/1-4M/B	43820	1/4" BSPT (M)	1/4" BSPT (M)
* HFC/1-4F/1-4M/B	43821	1/4" BSPT (F)	1/4" BSPT (M)
* HFC/1-4F/1-8M/B	43822	1/4" BSPT (F)	1/8" BSPT (M)
* HFC/1-4F/1-8M/N	43823	1/4" NPTF (F)	1/8" NPTF (M)
* HFC/1-4F/1-4M/N	43824	1/4" NPTF (F)	1/4" NPTF (M)
HFC/1-4M/1-2-27M/N	43825	1/4" NPTF (M)	1/2" - 27 NS (M)
* BESTSELLER			

The Groz name, Groz logo and the  mark are trademarks of Groz Engineering Tools (P) Ltd. India